

ThetaVAC-2 Vacuum Cold Mounting Machine

MOUNTING





TROJAN (SUZHOU) MATERIAL TECHNOLOGY CO., LTD

ThetaVAC-2 Vacuum Cold Mounting Machine

ThetaVAC-2 is a light and compact program-controlled vacuum mounting machine. External compressed air can be quickly and effectively vacuumed, and it can also be connected to a vacuum pump for vacuum cold mounting of epoxy resin. With excellent pore impregnation function, it allows epoxy resin to penetrate into tiny pores and cracks quickly and efficiently, thus ensuring edge protection and full filling of the sample. It is ideal for porous materials, such as failure analysis specimens for cracks, porous castings, composites and preparation of samples for electronic components, rock minerals, ceramics, etc.



- Program control, the vacuum degree, the number of cycles and the corresponding time can be set;
- Extra large vacuum chamber for up to 12 samples (40mm diameter);
- Electric rotary table for easy and fast mounting;
- External connecting the compressed air source, easy to operate, safe and reliable (can also be connected to vacuum air pump);
- Interior of Teflon coated, easy to clean.






Technical Data:

Model		ThetaVAC-2
	Power Supply	100-240V, 50Hz, 35W(excluding vacuum pump)
	Control	7-inch touch screen
Electrical	Timing Cycle	Timing range: 0-10min, automatic air extraction / deflation, automatic circulation
	Max. cycle times	100 times
	Program	20 sets
	Vacuum Level	0 ~ - 80kPa, vacuum pump 0 ~ - 90kpa
Vacuum	Maximum Vacuum Flow	75L/min
vacuum	Air Consumption	28-42L/min
	Noise	55-60dB
	Size	The inner diameter is $\Phi 252,$ and 12 $\Phi 40$ samples can be placed at the same time
Chamber	Height	For molds with diameter less than 100mm, the maximum height is 100mm; Molds with diameter greater than 100mm, the maximum height is 80mm.
	Control	Button inching, direction: clockwise / counterclockwise
Operating	Temperature	0-60°C
Environment	Humidity	0-95%RH
Oil-free	Voltage	Same as input voltage
vacuum	Power	350W
pump	Cable Connector	Chinese standard plug
Dimension	W×D×H	507×464×267mm; 507×464×644mm(open)
Weight		18kg

Control Panel Introduction:

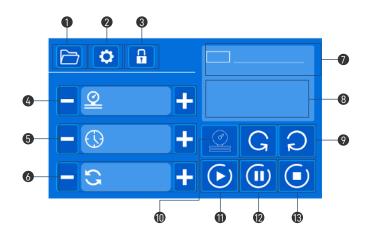

0	Program Group	2	Settings
3	Screen Lock	4	Pressure adjustment bar
6	Timing adjustment bar	6	Setting of cycle times
7	Program name	8	Real time value
9	Forward and reverse	0	Vacuum start button
0	Run button	12	Pouring button
ß	Stop button		

Related Consumables & Accessories:



Cold Mounting System




Silicone Mold Cups




Sample Support Clip

Unite: mm

Dimension Figure





Standard Accessories:

1	Enlarged base plate			1рс
2	Disposable paper cup	12 month		5pcs
3	The stirring rod	ance!		5pcs
4	Disposable pouring pipe	\mathbf{O}		5pcs
5	Air inlet pipe	0	Ф6mm PU pipe (With quick connector)	1рс
6	Silicone Mold Cups		Φ30*18mm(depth)	2рс
7	Oil-free vacuum pump		Flow rate: 110L/Min, Power: 350W	1рс
8	Power cable		220V, 10A, 1.5M	1рс

Purchase list:

Cold Mounting System:

02.04.721	TJ 2221A Epoxy King	2kg	
02.04.722	TJ 2221B Curing agent	1kg	
02.04.871	TJ 2228A Epoxy Slow	2kg	
02.04.872	TJ 2228B Curing agent	1kg	
02.04.773	TJ 2226A Epoxy Resin	1kg	
02.04.774	TJ 2226B Curing agent	230g	
02.04.853	TJ 2562A Epoxy Thin	1.5kg	
02.04.854	TJ 2562B Curing agent	0.5kg	

Sample Support Clip:

07.01.010/012	Plastic Coil Clip,6*100mm	100pcs/1000pcs
07.01.016/017	Stainless Steel Clip,7*120mm	100pcs/1000pcs
07.04.010/012	T Black Plastic Clip,10*9*13mm	100pcs/500pcs
07.03.010	T White Plastic Clip,10*9*13mm	100pcs
07.05.001	S Black Plastic Clip,20*10*8mm	100pcs

Mounting Cups:

	08.02.002	Ф25*20mm		
2-Part	08.02.004	Ф30*23mm	10	
Mounting Cups (Separate Firm Molds)	08.02.006	Ф32*25mm	10pcs	
	08.02.008	Ф40*27mm		
	08.02.018	Ф20*18mm(depth)		
	08.02.020	Ф25*18mm(depth)		
Silicone Mold Cups	08.02.022	Ф30*18mm(depth)	10pcs	
(Silicone)	08.02.030-1	Ф40*25mm(depth)	τυρος	
	08.02.050	50*70*20mm(rectangle)		
	08.02.058	180*106*30mm(rectangle)		
	08.02.110	Ф25		
Teflon Mold Cups (Teflon,easy release)	08.02.120	Ф30	1pc	
(08.02.132	Ф40		



TROJAN (SUZHOU) MATERIAL TECHNOLOGY CO.,LTD

Tel: +86-512-65283666 Email: sales@trojanchina.com Web: www.trojanworld.com Add: Building 26,No.228 Gongtang Road,Luzhi Town,Wuzhong Suzhou,China

